



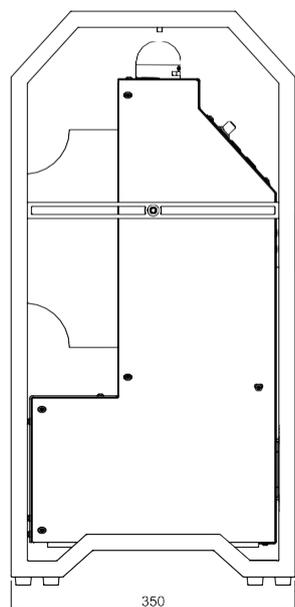

EHX-03^A

EHX-03A is a powerful and mobile generator, suitable for both mounting and dismounting. Using a Flexible Inductor, it is possible to heat components with different geometries, such as gears, couplings, and bearings.

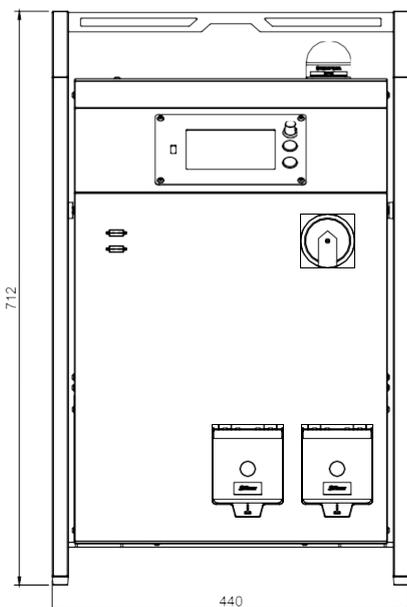

SPECIFICATIONS

INPUT *(Supplied Power)*

Voltage	400 - 480 V
Current (max.)	32 - 40 A
Frequency	50 / 60 Hz


OUTPUT *(Generated Power)*

Voltage (max.)	540 - 660 V
Current (max.)	57 A
Output Power (max.)	22 - 30 kW



Compared to the previous generation of middle-frequency generators, EHX-03A is a significant step forward. We have managed to create a more powerful output, with a form factor 3 times smaller than its predecessor.

Dimensions (L x B x H)	440 x 350 x 712 mm
Weight	39 kg





USER INTERFACE

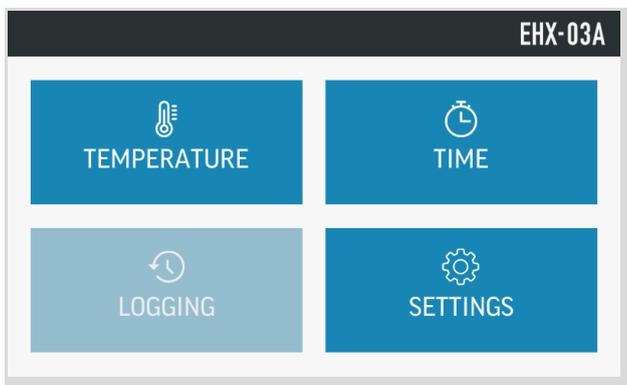

The user interface is equipped with two different Heating Modes, namely Temperature Mode and Time Mode. Through these modes, the user can easily control the heating of the component.

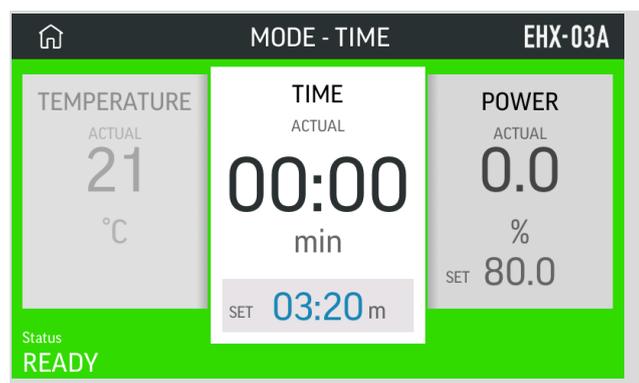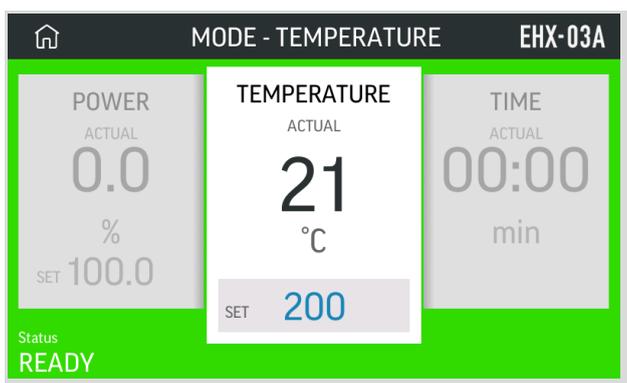

EXAMPLES OF USE

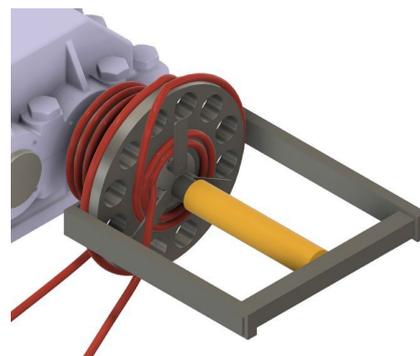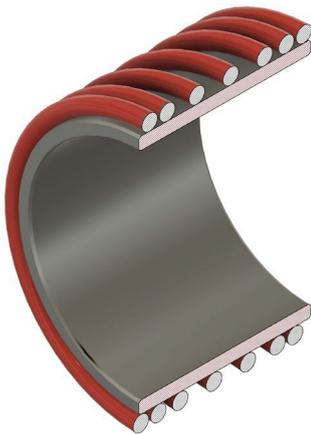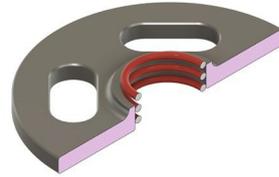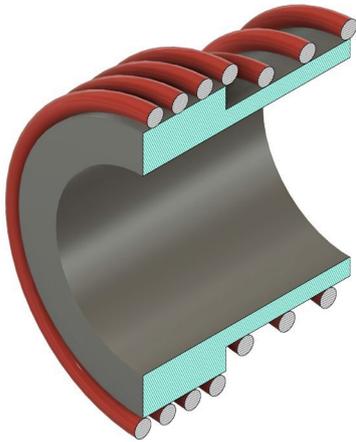

PRODUCTS

Art. No.	Item	Voltage	Current (max.)	Frequency
100540	EHX-03A (400V / 32A)	400V	32A	50/60 Hz
100550	EHX-03A (400 - 440V / 40A)	400V	40A	50/60 Hz
100545	EHX-03A (480V / 30A)	480V	30A	50/60 Hz
100555	EHX-03A (460 - 480V / 40A)	480V	40A	50/60 Hz

The following items are included for the article numbers shown above. Flexible Inductors are sold separately (see accessories), but are added to the EHX-03A crate upon order.

- ▶ EHX-03A Generator
- ▶ Temperature Sensor
- ▶ Heat-resistant gloves
- ▶ User Manual

ACCESSORIES

Art. No.	Item	Reference
006110	Flexible inductor / EHX-03A / max. 300°C/572°F - 15m	A
006111	Flexible inductor / EHX-03A / max. 300°C/572°F - 25m	A
006112	Flexible inductor / EHX-03A / max. 300°C/572°F - 35m	A
006177	Temperature Sensor 350°C - 3000mm	B
006183	Magnetic Holder for Flexible Inductor / EHX-03A (set of 4)	C

